

Fast-Fit Range

Why Choose Fast-Fit?

The Fast-Fit Cubicle range is a cost effective cubicle system. Fast-Fit Cubicles are functional, durable and attractive; manufactued in the UK from 19mm Melamine Faced Chipboard to a high standard, they are suitable for low-mid traffic, low-moisture areas. The Cubicles come in three colour options, White, Grey and Cream.



Who are Total Cubicle Solutions?

Total Cubicle Solutions offer an extensive range of Cubicles, Wall Cladding Boards, IPS duct panels, and Vanity Units. Manufactured in the UK, our innovative products are made to the highest of standards.

Each of our Washroom Systems are crafted to precision by our in-house team allowing you con\(\text{Mdence} \) dence and assurance specifying Total Cubicles for all your Washroom needs. With over 45 years industry experience and a passion for stylish yet affordable Cubicle Solutions, our friendly staff will offer helpful advice on all our products.

Simple Order Process

There are several ways you can oder Fast-Fit Cubicles...

- E-mail our sales team
- Call our sales team
- Fax your enquiry



Choose Your Layout

Fast-Fit Cubicles are designed to accommodate four standard layout options. Determine which best suits your space needs. The four options are detailed overleaf.



Choose How Many Cubicles You Require

Each Fast-Fit Cubicle is manufactured to standard dimensions of 1500 mm deep at 800 mm centres. Determine how many you require to ⊠t your space needs.



Choose The Colours You Require

The Fast-Fit range is available in 3 colours; White, Grey and Cream. The colour of the Doors, Pilasters and Partitions can be speci⊠ed individually to provide contrasting colour options, i.e. White partitions / Grey doors.




Express Delivery

Our speedy delivery service ensures that your Cubicles are delivered promptly. Where possible we will endevour to dispatch your items within 48 hours nationwide.


If you prefer, you can also collect your items direct from our Warehouse.

Standard Layout Options


C/L Corner Layout




B/W Between Walls




Typical Front Elevation

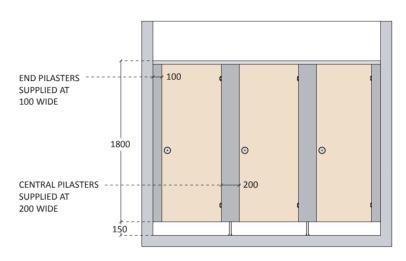


F/S Free Standing



S/I Single In-Line Partition



Typical Side Elevation

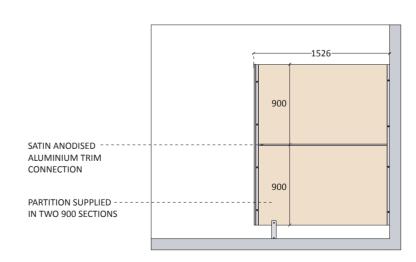

ALL DIMENSIONS ARE QUOTED IN MILLIMETERS

Optional Extras

Additional Components


To increase the exibility of the Fast-Fit range we offer a number of alternative sized components, allowing you to create alternative which are not satis ed by our standard dimensions.


- 200mm optional Pilaster
- 300mm optional Pilaster
- Partitions available at 1800mm deep x 900mm


Cutting the Components

Our components can be cut to size on-site using suitable carpentry tools to acheive desired sizes.

For instance, should you require partitions at a depth of 1700mm, you can acheive this by purchsing an 1800mm deep partition and trimming 100mm before assembling the cubicles. Placing the Satin Anodised Aluminium trims supplied over the cut edges maintains a clean nish.





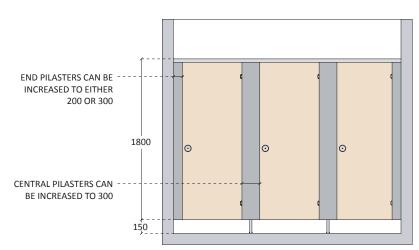

If you require any further information regarding our Optional Extras please do not hesitate to contact our technical department.


Optional Extras

Accommodating Bigger Rooms

Our additional components can be con gured with all of our layout options:

- Corner Layout
- Between Walls
- Free Standing
- Single In-Line Partition

Any combination of additional extras can be used to achieve your bespoke layout.

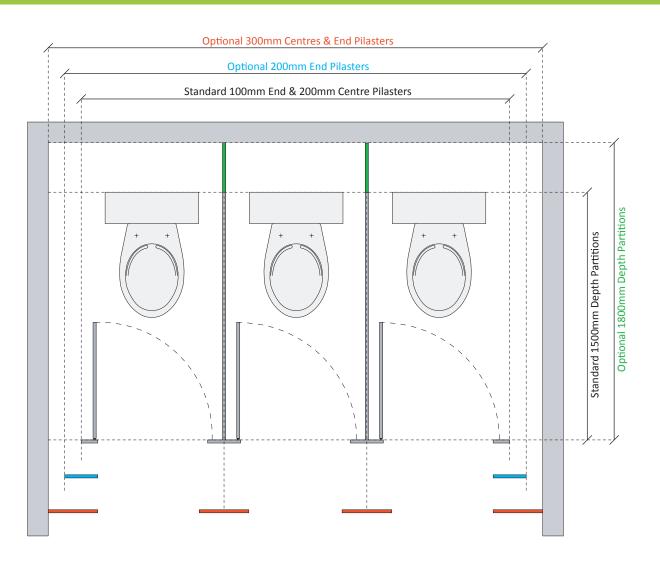

Fast-Fit Specifications

Cubicle Speci⊠cation

Material: Melamine Faced Chipboard

Thickness: 19 mm

Edging Material: 2 mm PVC in matching colour

Suitability of Use: Low-Mid traffic, Low moisture areas

Fittings: Satin Anodised Aluminium

Overall Dimensions: 1500 mm deep, 800 mm centres

Colour Options

The colour of the Doors, Pilasters and Partitions can be speci⊠ed individually.







White

Grey

Cream

Fittings

All Mttings required to assemble your Fast-Fit Cubicle System are supplied in Satin Anodised Aluminium. This includes Brackets, Hinges, Headrails, Screws, Bolts, Legs, Locks, Coat Hooks and Toilet Roll Holders. Please note, Fast-Fit Cubicles are supplied Mat-packed for assembly on-site.

Replacement \(\text{\text{Mttings}} \) can be ordered from our \(\text{\text{Mttings}} \) website: \(\text{www.cubicle} \text{\text{\text{Mttings.com}}} \)



Address: Total Cubicle Solutions

Units 5-7, Luton Street Liverpool, L5 9XR

Telephone: 0844 800 7785 **Fax:** 0844 800 7738

Email: sales@totalcubicles.co.uk
Website: www.totalcubicles.co.uk

Fast-Fit Cubicle - Assembly Instructions

1


Set the Channel Brackets 135mm off the \boxtimes nished \boxtimes oor level, \boxtimes xing at the locations shown.


2


Slot End Pilasters and Partition Panels into the Channel Brackets and ⊠x in positions as shown below.

3

Fix legs to the partitions and clip H-Section Brackets to the top of the Partition Panels as shown below. The H-Sections can be screwed into the top of the Partition Panrels for extra strength and security.



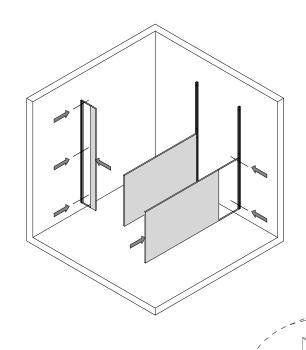



Please note: We no longer pre-drill the partitions as Soil Stacks, and Window positions can compromise the atting position. Normally our Cubicles are divided equally along the wallspace except where Ambulant or Disabled Cubciles are to be implemented. Channel Brackets are provided at standard lengths and may need cutting to size. These instructions show a typical Twin Open End cubicle arrangement, your speciac layout may differ but the princiapals remain the same.

Fast-Fit Cubicle - Assembly Instructions

4


Fix Channel brackets to the rear of Pilasters as shown below.

5


Fix second Partition Panel into the H-section as shown below. Offer up Pilasters to the end of the Partition Panels.


6

Fix Head Rail into top of Pilasters and x through Channel Brackets on the Pilasters to Secure in place.




Channel brackets to be located centrally for pilasters between adjoining cubicles.



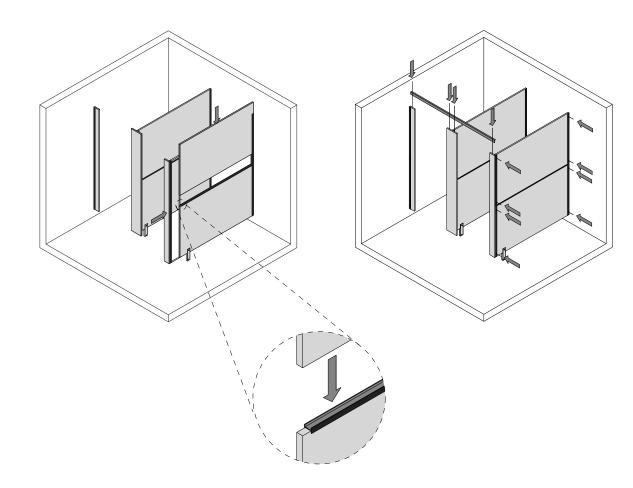

Fast-Fit Cubicle - Assembly Instructions

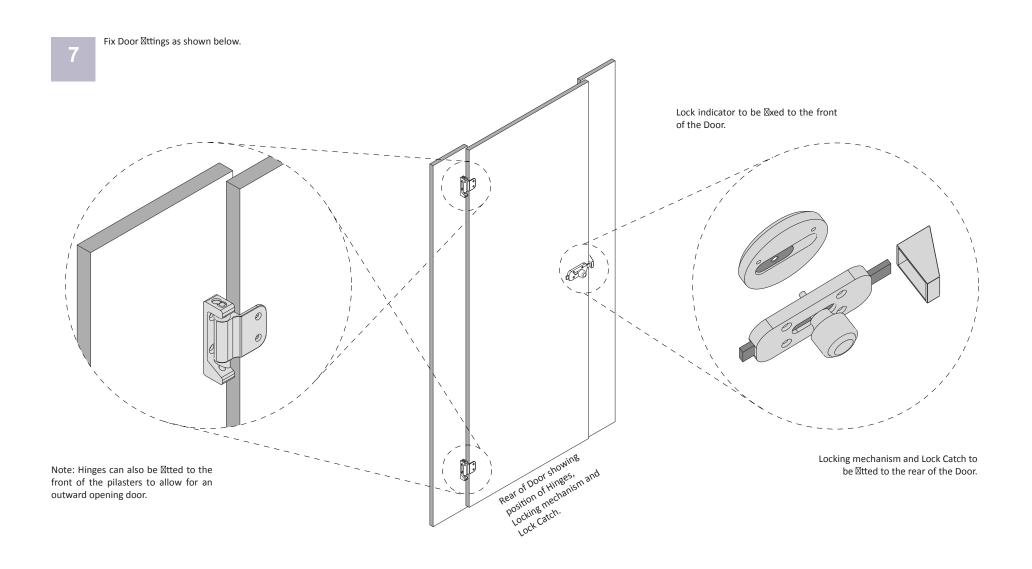

Vanity Units

The Fast-Fit Range of vanity units has an exceptional resisistance to water and impact. They are available in matching colours to the Fast-Fit range of cubicles.








ALL DIMENSIONS ARE QUOTED IN MILLIMETERS

Vanity Unit Layout Options

Standard Vanity Unit


FFVSTD





Semi-recessed Vanity Unit FFVSR






Standard Vanity Unit with Loose Upstand

FFVSTDLU






Semi-recessed Vanity Unit with Loose Upstand

FFVSRLU






Standard Vanity Unit with Coved Integral Upstand

FFVSTDCU






Semi-recessed Vanity Unit with Coved Integral Upstand

FFVSRCU





IPS Panels

The Fast-Fit range of IPS units has an exceptional resisistance to water and impact.







IPS Layout Options

Free Standing Open Ended Left Open Ended Right (FS) (OELH) Open Ended Right Various Some Various Some Various Some Various

Panel Options

Postformed - available on parallel edges only









End Elevation



Hole In Wall

Various

(HIW)